


IG-22GM

01&02 TYPE



REDUCTION RATIO	L	REDUCTION RATIO	L
1/4	14.40	1/198 ~ 1/455	25.35
1/14 ~ 1/19	18.05	1/742 ~ 1/1996	29.00
1/53 ~ 1/104	21.70		

外形尺寸 APPEARANCE SIZE

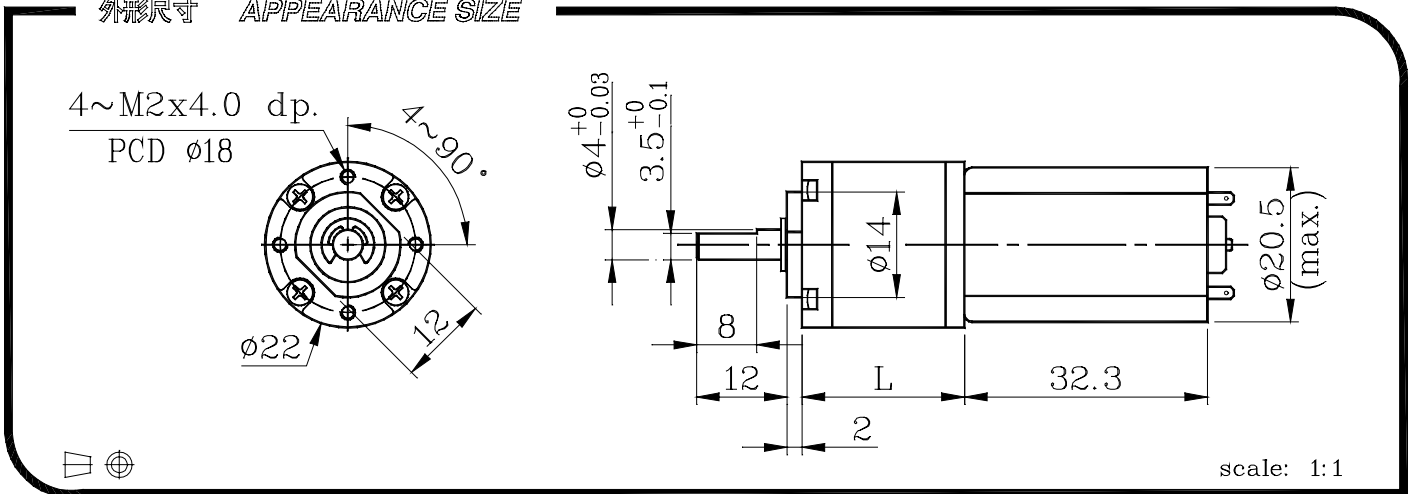

GEARED MOTOR TORQUE/SPEED

減速比 Reduction ratio	1/4	1/14	1/16	1/19	1/53	1/62	1/72	1/84	1/104	1/198	1/231	1/270	1/316	1/370	1/455	1/742	1/1014	1/1249	1/1621	1/1996	
	12V 定格扭力(g-cm) Rated torque 定格回轉數(rpm) Rated speed	77	215	250	295	695	810	950	1100	1370	2100	2500	2500	2500	2500	2500	3000	3000	3000	3000	3000
24V 定格扭力(g-cm) Rated torque 定格回轉數(rpm) Rated speed	77	215	250	295	695	810	950	1100	1370	2100	2500	2500	2500	2500	2500	3000	3000	3000	3000	3000	3000

馬達單體型式

MOTOR INSTALLATION

定格電壓 (V) Rated volt	定格扭力 (g-cm) Rated torque	定格回轉數 (rpm) Rated speed	定格電流 (mA) Rated current	無負荷回轉數 (rpm) No load speed	無負荷電流 (mA) No load current	定格出力 (W) Rated output
12	22	6700	200	8000	70	1.5
24	22	7400	110	9000	40	1.7

馬達單體特性圖

MOTOR CHARACTERISTICS

